


LOOK AT CHANGE FROM WINSA

2022 PRODUCT CATALOGUE



winsa®



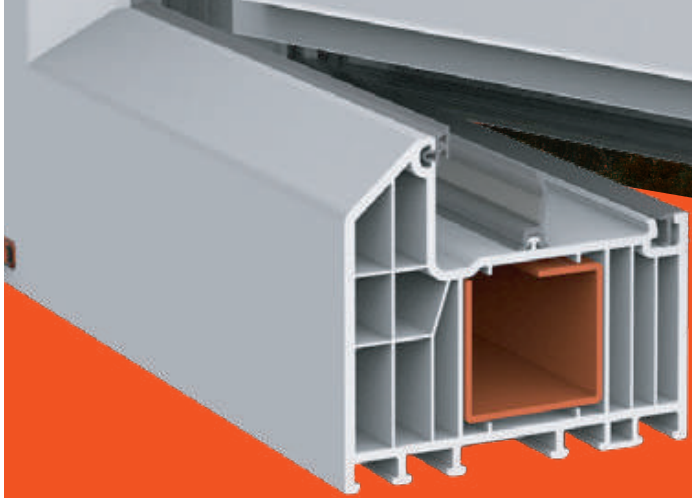

by winsa
Revotech
 REVOLUTION IN WINDOW TECHNOLOGY
gold



$U_f: 0,90 \text{ W / (m}^2 \cdot \text{K)}$




$R_{w, (C; C_p)} = 43^* (-2; -5) \text{ dB}$

Revotech Gold, with a profile width of 90 mm, manufactured up to international standards, offers unique heat and sound insulation to its users with 7 cubicles and a middle gasket structure.

- Profile Width** : 90 mm
- Number of Cubicles** : 7
- Class** : B Class - TS 5358 - EN 12608
- Gasket** : TPE Gray/Black
- Number of Gaskets** : 3
- Glazing Bead** : Single claw - PCE gasket
- Glass Thickness** : 24, 30, 36, 44, 52 mm

*Provided with LSG acoustic 12/Argon 20/LSG acoustic 10 acoustic glass..

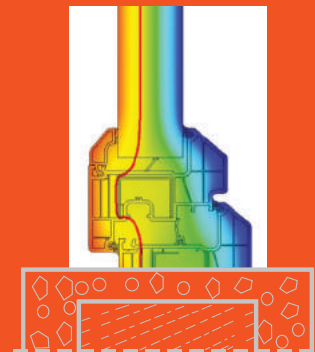



by winsa
Revotech
 REVOLUTION IN WINDOW TECHNOLOGY




$U_f: 0,90 \text{ W / (m}^2 \cdot \text{K)}$



$R_{w, (C; C_p)} = 43 \text{ (-2; -5) dB}$

- Profile Width** : 84 mm
- Number of Cubicles** : 7
- Class** : B Class - TS 5358 - EN 12608
- Gasket** : TPE Gray/Black
- Number of Gaskets** : 3
- Glazing Bead** : Single Claw - PCE Gasket
- Glass Thickness** : 24, 30, 36, 44, 52 mm

*Provided with LSG acoustic 12/Argon 20/LSG acoustic 10 acoustic glass.





Dorado *gold*




$U_f: 1,1 W / (m^2K)$



$RW(C; C_t) = 32 (-1; -5) dB$

With its 6-cubicle form with a width of 76 mm and middle gasket (optional) structure, Dorado Gold offer extraordinary heat and sound insulation. It offers superior solutions with its double casement double span, inward and outward opening door options with or without sills.

Profile Width	: 76 mm
Number of Cubicles	: 6
Class:	: A Class - TS 5358 - EN 12608
Gasket	: TPE Gray/Black
Number of Gaskets	: 2/3 (Middle gasket optional)
Glazing Bead	: Single claw - PCE gasket
Number of Gaskets	: 4, 10, 20, 24, 26, 30, 36, 39 mm

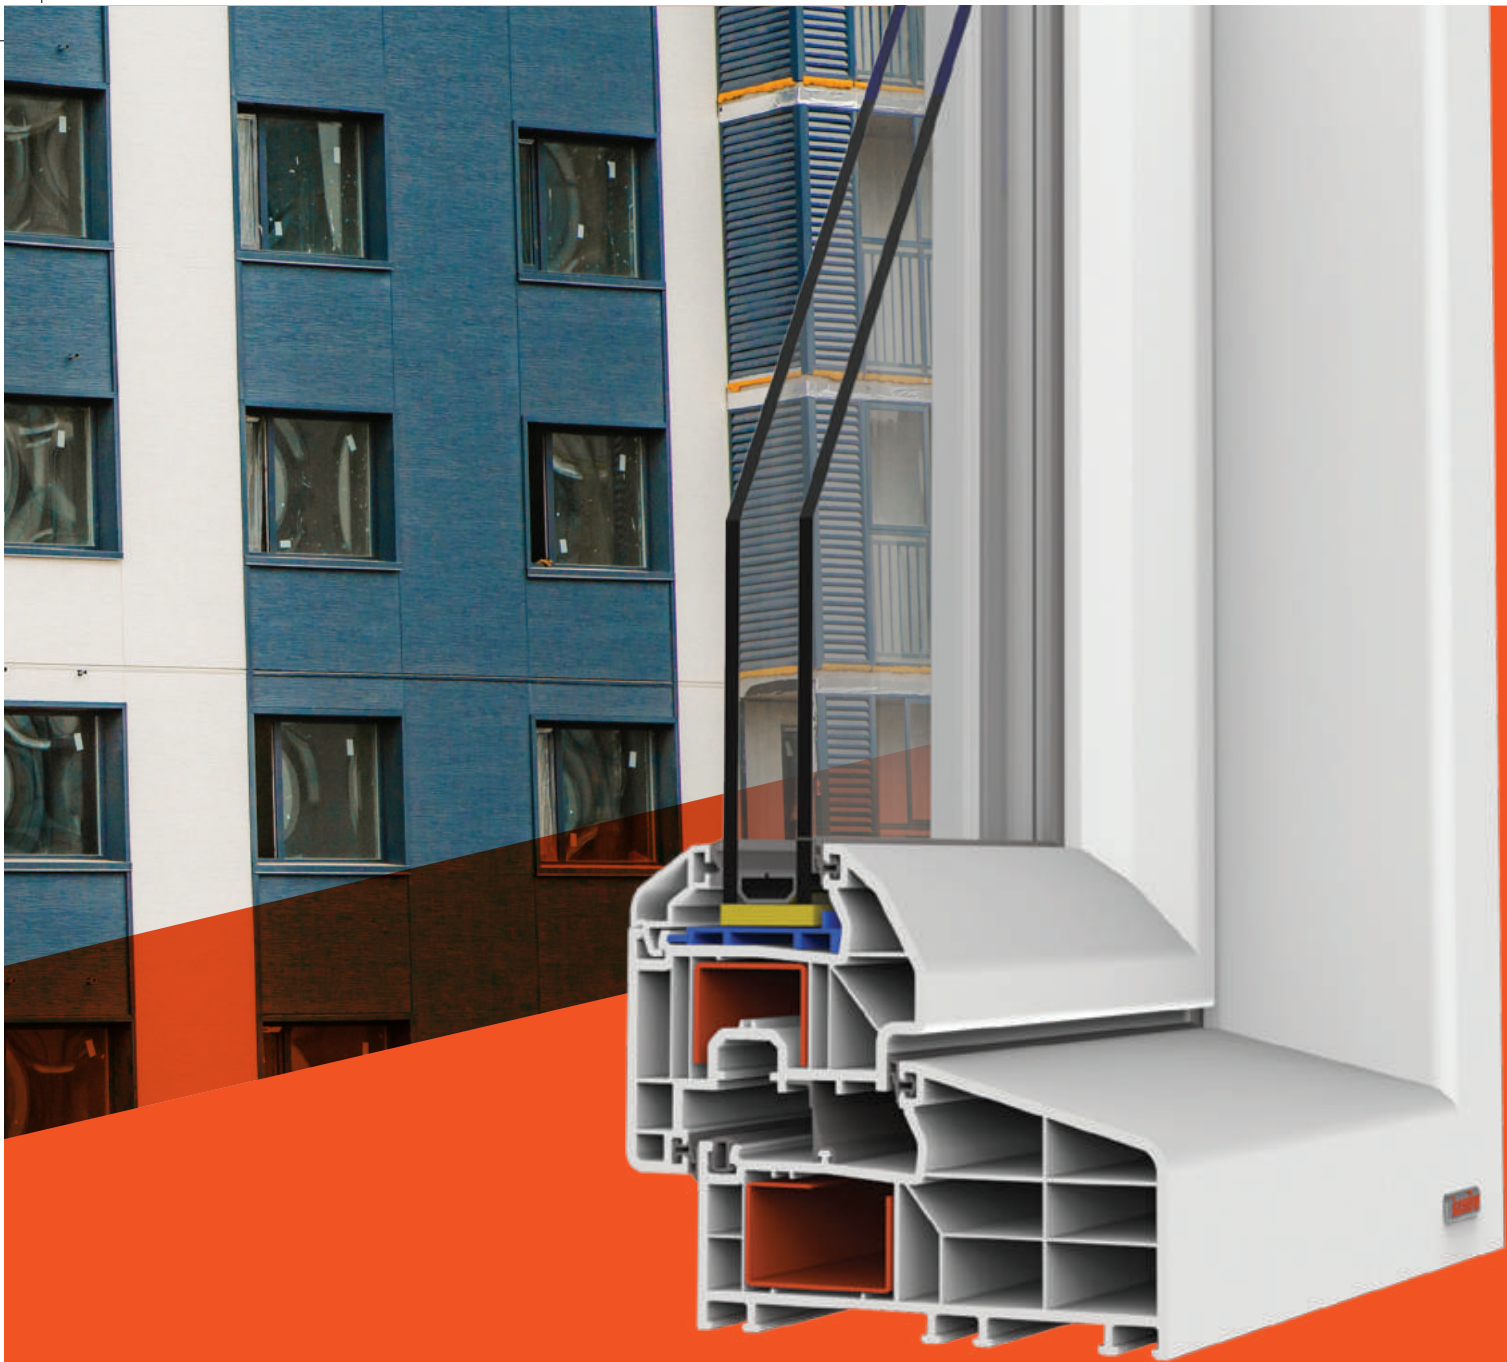

Dorado *gold* ultra frame

Dorado Gold Ultra Frame stands out with its aesthetic design and strong structure with its middle gasket (functional) structure. It offers wide usage possibilities in window and door applications. With its middle gasket structure, it provides superior sound and heat insulation in addition to high performance and solutions in wide and long-spans.

Profile Width	: 120 mm
Number of Cubicles	: 5
Class	: A Class - TS 5358 - EN 12608
Gasket	: TPE Gri / Siyah
Number of Gaskets	: 2/3 (Middle gasket optional)
Glazing Bead	: Single claw - PCE gasket
Number of Gaskets	: 4, 10, 20, 24, 26, 30, 36, 39 mm



Dorado

Dorado series with a profile width of 70 mm, has RAL A class certificate with its 5-cubicle structure.

Dorado offers ideal solutions for different locations with inward and outward opening door options with or without sills, parallel sliding, folding doors and pivot window options.




$U_f : 1,4 \text{ W} / (\text{m}^2 \cdot \text{K})$



$R_{w, (C; C_{tr})} = 32 (-1; -5) \text{ dB}$

Profile Width	: 70 mm
Number of Cubicles	: 5
Class	: A Class - TS - 5358 EN 12608
Gasket	: TPE Gray / Black
Number of Gaskets	: 2
Glazing Bead	: Single claw - PCE gasket
Number of Gaskets	: 4, 10, 20, 24, 26, 30, 36, 39 mm

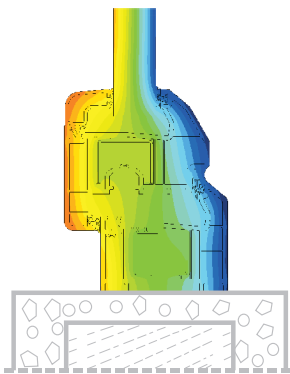



Safir

PVC Window and Door Profile Systems combining perfect insulation and aesthetics with slim contours and oval design.




U_f : 1,4-1,5 W / (m²K)



$R_{w, (C; C_{tr})}$ = 32 (-1; -5) dB

Profile Width	: 70 mm
Number of Cubicles	: 5
Class	: B Class - TS 5358 - EN 12608
Gasket	: TPE Gray / Black
Number of Gaskets	: 2
Glazing Bead	: Single claw - PCE gasket
Glass Thickness	: 4, 10, 20, 24, 26, 30, 36, 39 mm



Carina

A PVC Window and Door Profile System that has proven itself with its durable design defying years, which emerged from the superior combination of savings and cost-efficiency.




U_f : 1,5 W / (m².K)



$R_w, (C; C_{tr}) = 33 (-1; -4)$ dB

Profile Width	: 60 mm
Number of Cubicles	: 4
Class	: B Class - TS 5358 - EN 12608
Gasket	: TPE Gray / Black
Number of Gaskets	: 2
Glazing Bead	: Single claw - PCE gasket
Glass Thickness	: 4, 12, 20, 24, 30, 32, 36 mm

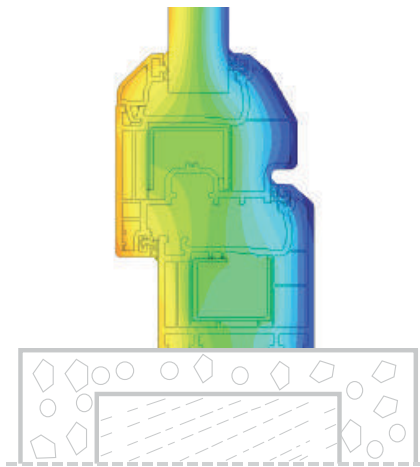



lotus

Lotus Axial Sliding Window and Door System has a modern, aesthetic and simple design. With its lower frame height, it offers a wider view, more light and spacious living spaces.

Frame Profile Width	: 122 mm
Casement Profile Width	: 45 mm
Number of Cubicles (Frame)	: 4
Gasket	: TPE Gray / Black
Glazing Bead	: Single Claw - PCE Gasket
Glass Thickness	: 4, 5, 20, 24, 26, 29 mm



Panorama HS 76






U_f : 1,2 W / (m².K)



$R_{w, (C; C_{tr})}$ = 32 (-1; -4) dB

The window profile system that adds the outdoor spaces to your home without compromising from insulation and allows you to experience the view in the comfort of your home.

Profile Width	: 175 mm
Casement Profile Width	: 76 mm
Class/Standard	: TS 5358 - EN 12608
Gasket	: TPE Gray / Black
Glazing Bead	: Single claw - PCE gasket
Glass Thickness	: 4, 10, 20, 24, 26, 30, 36, 39 mm

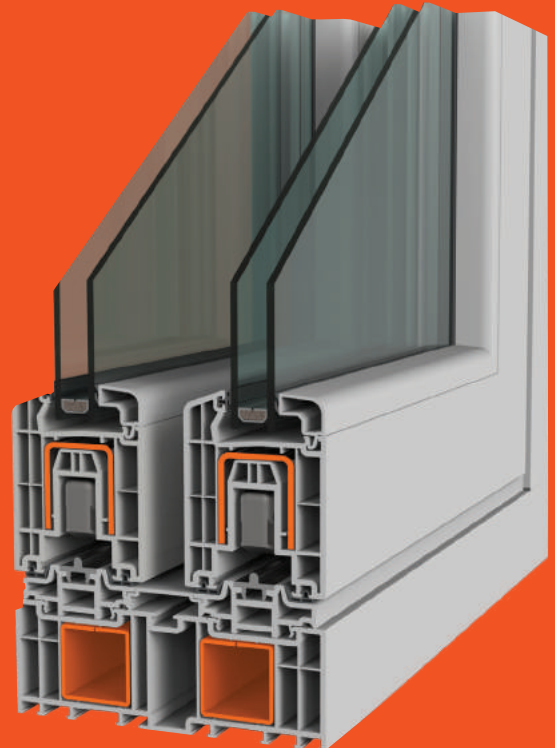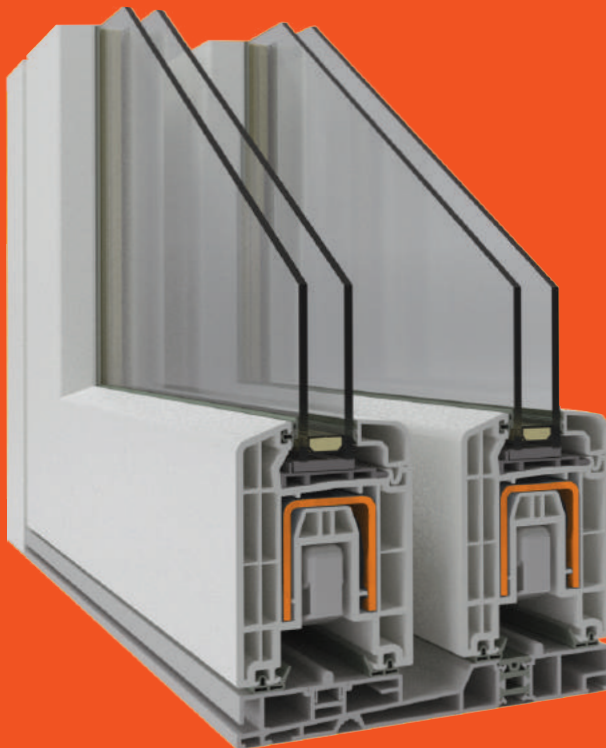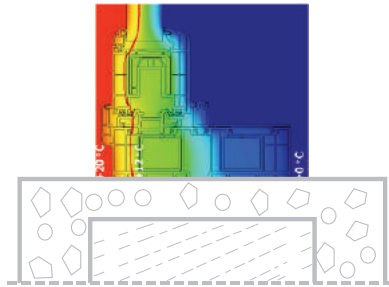




Comfort Slide

Comfort Slide PVC sliding door and window system was designed with the expertise and professionalism gained from international experiences by aiming to offer ease of use and sound insulation as well as offering more living spaces.

Frame Profile Width	: 149 mm
Casement Profile Width	: 76 mm
Number of Cubicles (Frame)	: 5
Number of Cubicles (Casement)	: 5
Gasket	: TPE Gray/Black
Number of Gaskets	: 2
Glazing Bead	: Single claw - PCE gasket
Glass Thickness	: 24, 30, 36, 44, 52 mm

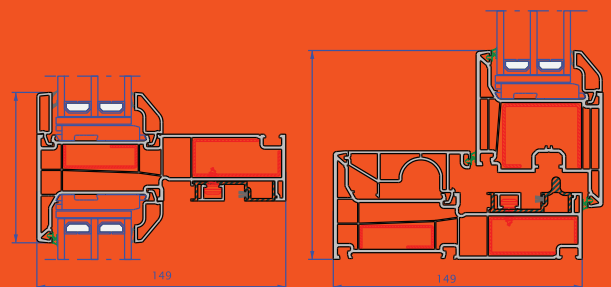

winkepenk

A PVC blind system that enables you to feel the warm breeze of the Mediterranean on your face wherever you are; offering visual wealth to your home with different application and color options.

Facade-opening blind casement can be folded as a single casement or to the left and right and can be applied as three or four casements. It has an optional channel application inside the casement.



winstor

Whatever the weather conditions outside, it undertakes the control of the seasons, is compatible with all PVC window and door systems and is unique thanks to its chic design and superior insulation quality.


- 185 x 185 Box
- 220 x 220 Box
- 185 x 220 Insulated Box
- 220 x 225 Insulated Box
- Fly Screen can be applied.




WITH WINSA TRANSOM PRIORITY

DOUBLE OPENING SYSTEM, SAFETY IS SECURED FROM ALL ASPECTS

- It is the system in which the transom opens with the first movement of the arm position, and a straight opening is established with the second movement.
- Provides user safety in multi-storey buildings.
- Practical for ensuring the safety of children, especially in high buildings.
- Can be applied with a casement width between 400 mm - 1100 mm, casement height between 450 mm - 2400 mm.
- Compatible with white and laminated profiles with hinge cover color options.
- Can be used easily with Winsa branded double opening and safe double openings.

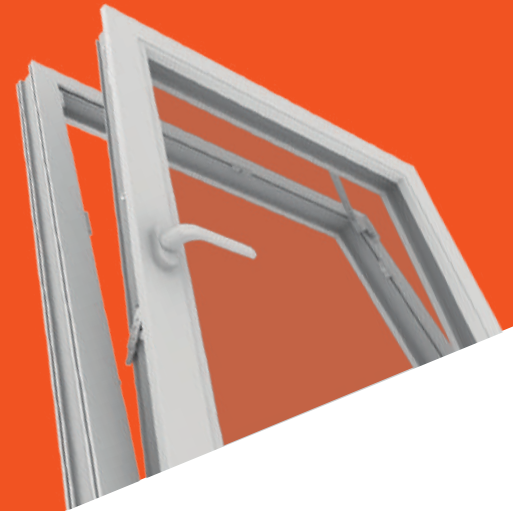

Color Options

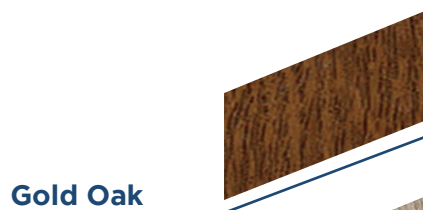

Gold Oak




Antique Oak



Mink



Anthracite Gray

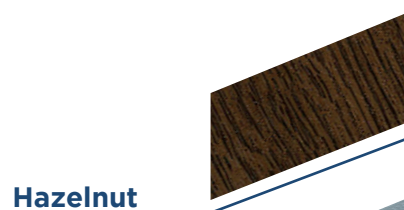


Hazelnut



Silver



Cream

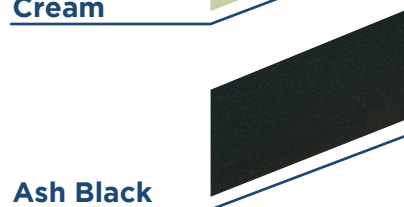

Ash Black



Mahogany



Metallic Silver



Winchester



Metallic Anthracite Gray



Anthracite Gray



2022



+2 02 33 0 33 222

winsa.pro

